
### View of cladding

### ::Fundermax

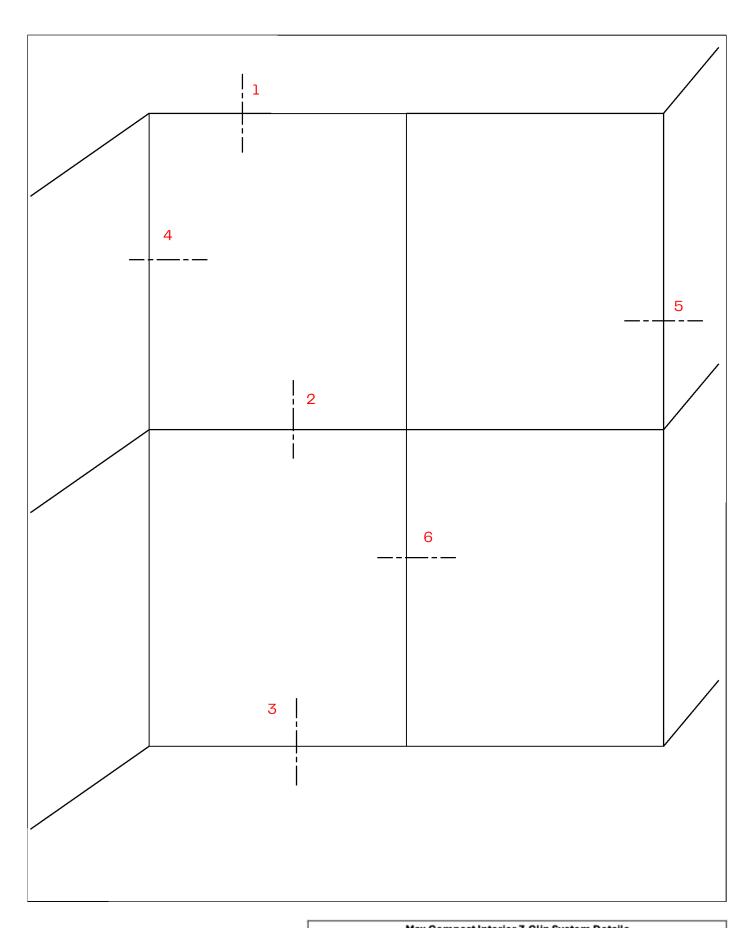



Max Compact Interior 2-Ctip System Details
Please refer to Fundermax "Technique Interior" brochure for complete information.
3/4" Min., 3 1/4" Max. distance from edge of panel to first clip.


Maximum Vertical Clip Spacing on 10mm thick panels = 30"

Maximum Horizontal Clip Spacing on 10mm thick panels = 36"

10mm Thick Max Compact Interior Panel weight = 3 lbs/SF

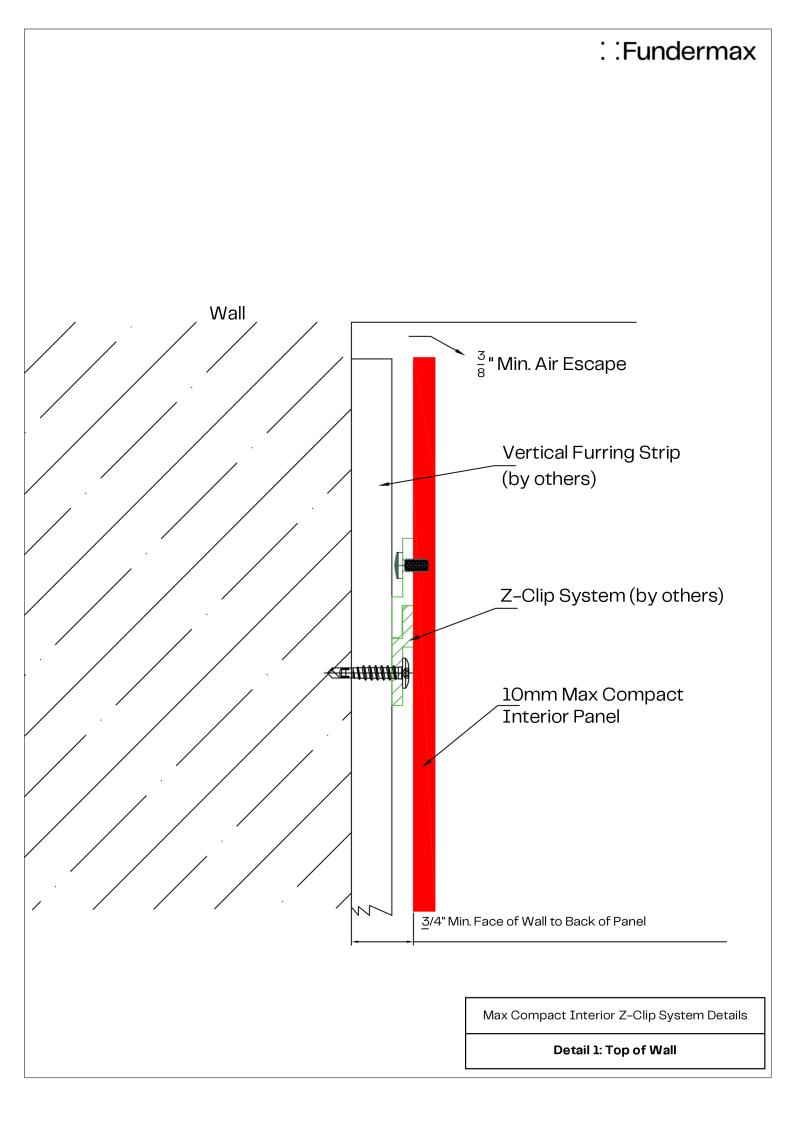


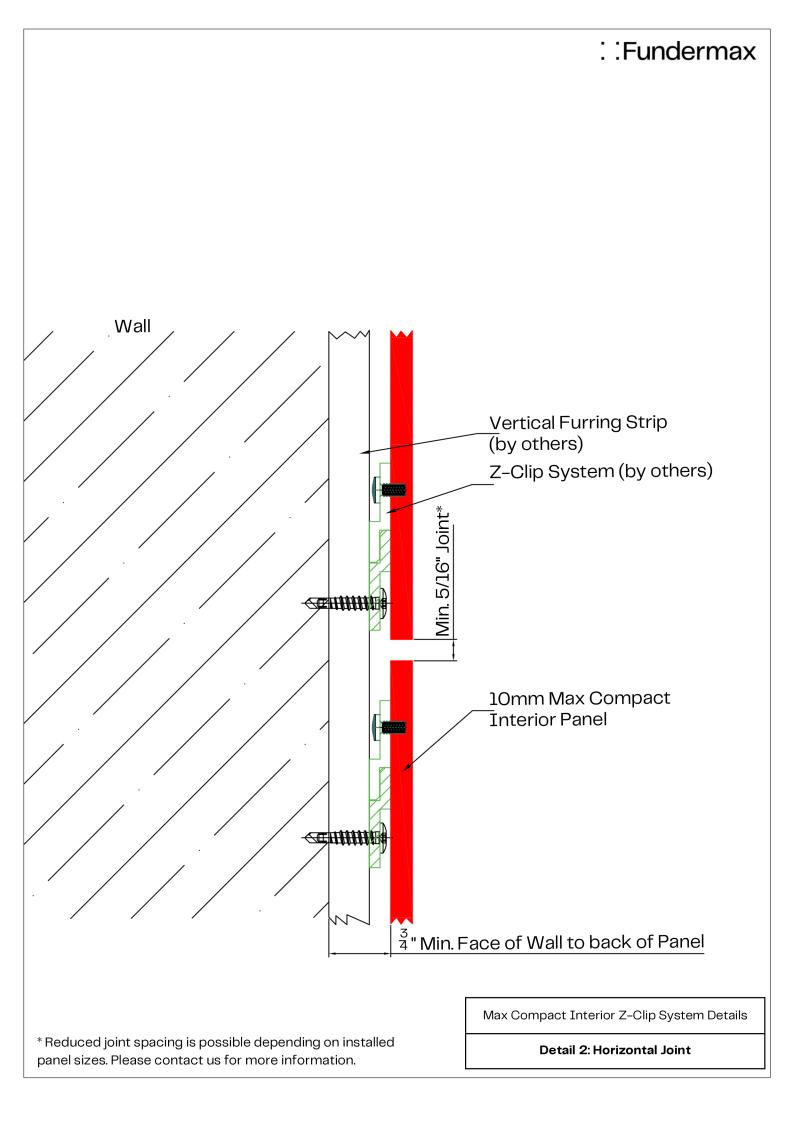

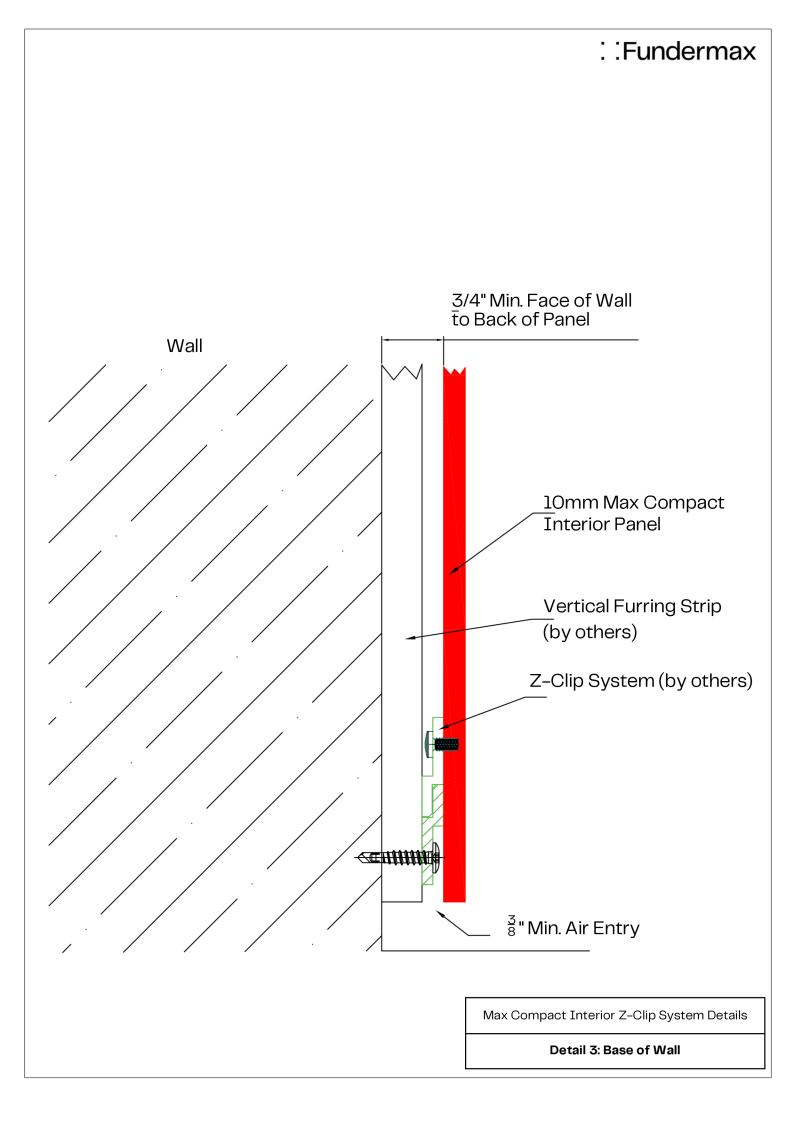

# ::Fundermax Wall $\frac{5}{16}$ " Min Joint\* Z-Clip System (by others) Vertical Furring Strip (by others) 10mm Max Compact Interior Panel 3/4" Min. Face of Wall to Back of Panel Max Compact Interior Z-Clip System Details \* Reduced joint spacing is possible depending on installed **Detail 4: Inside Corner** panel sizes. Please contact us for more information.

#### ::Fundermax

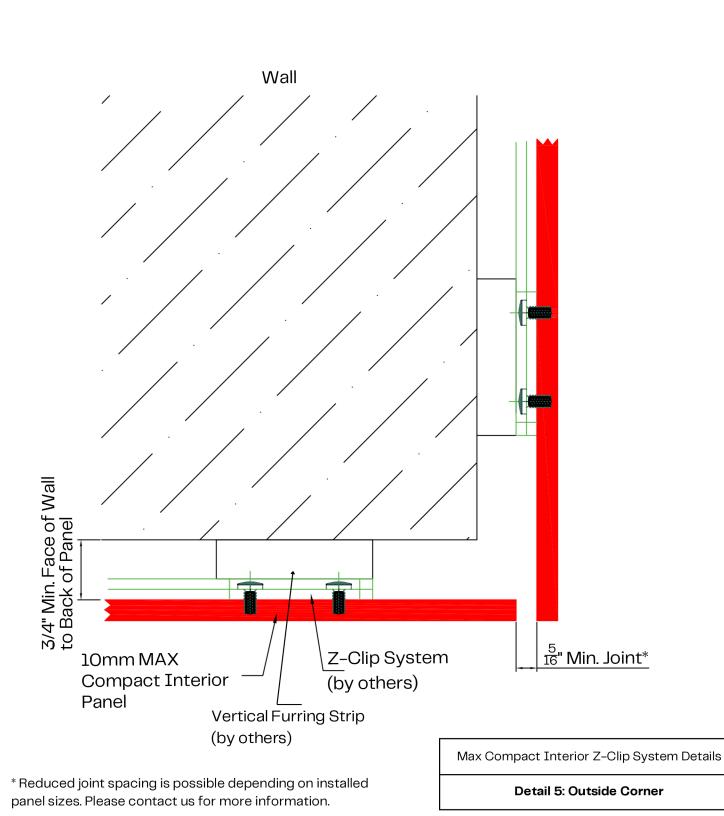

## ::Fundermax Wall <sup>5</sup> Min. Joint\* Z-Clip System (by others) Z-Clip System (by others) 10mm Max Compact **Interior Panel** Vertical Furring Strip 3/4" Min. Face of Wall, (by others) to Back of Panel

\* Reduced joint spacing is possible depending on installed panel sizes. Please contact us for more information.

Max Compact Interior Z-Clip System Details

**Detail 6: Vertical Joint**